



# TigerStop<sup>®</sup>

## *Inkjet Printer*

May 2006

### *VideoJet<sup>®</sup> Excel 2000 Series Printer*

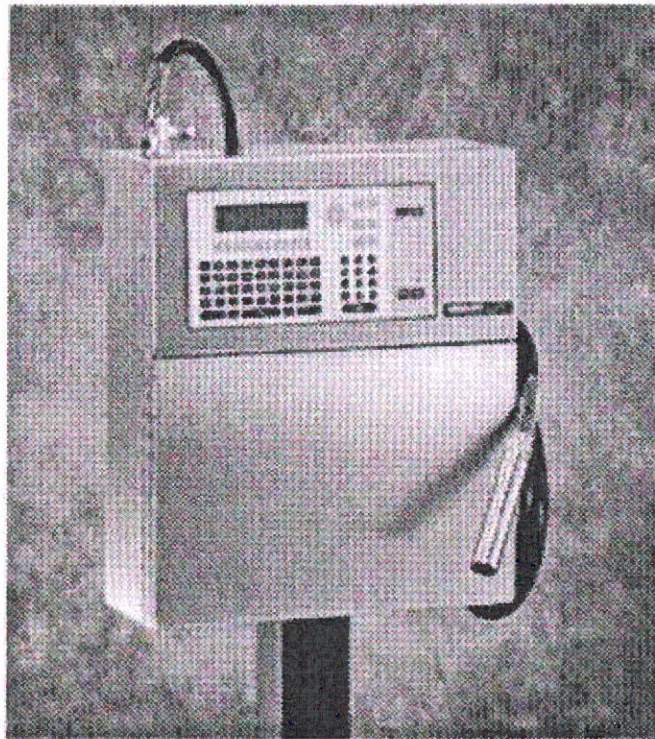

**Contact information:**

TigerStop LLC, Assembly Plant, 12909 NE 95<sup>th</sup> St., Vancouver, WA 98682

Tel: 360 254-0661 • Fax: 360 260-0755 • Website: [www.tigerstop.com](http://www.tigerstop.com) • Email: [service@tigerstop.com](mailto:service@tigerstop.com)



# Video Jet Printer Setup

## Important!

The printer head is VERY FRAGILE. Do not drop it or let it fall in any way!

Follow these steps to set up the Video Jet printer.

1. Install the encoder wires (Figs. 1 - 3).

*The encoder end plate ships installed on the TigerStop.*


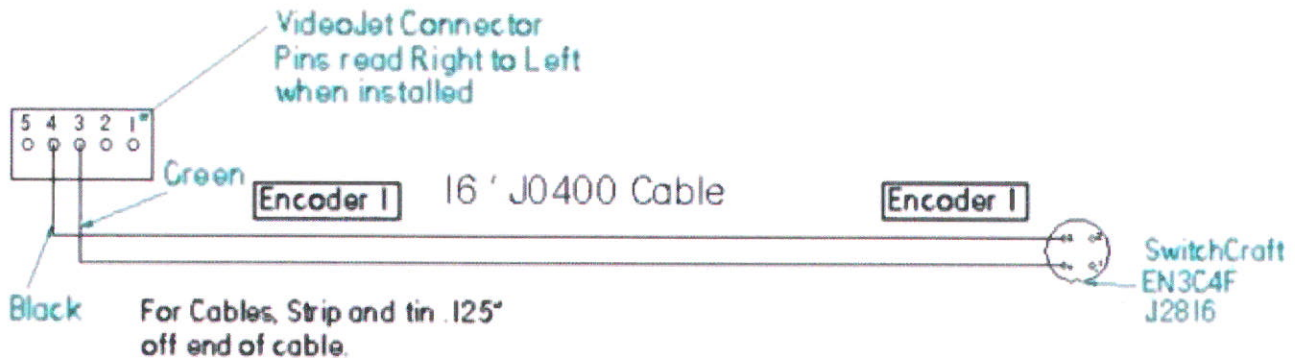


Fig. 1

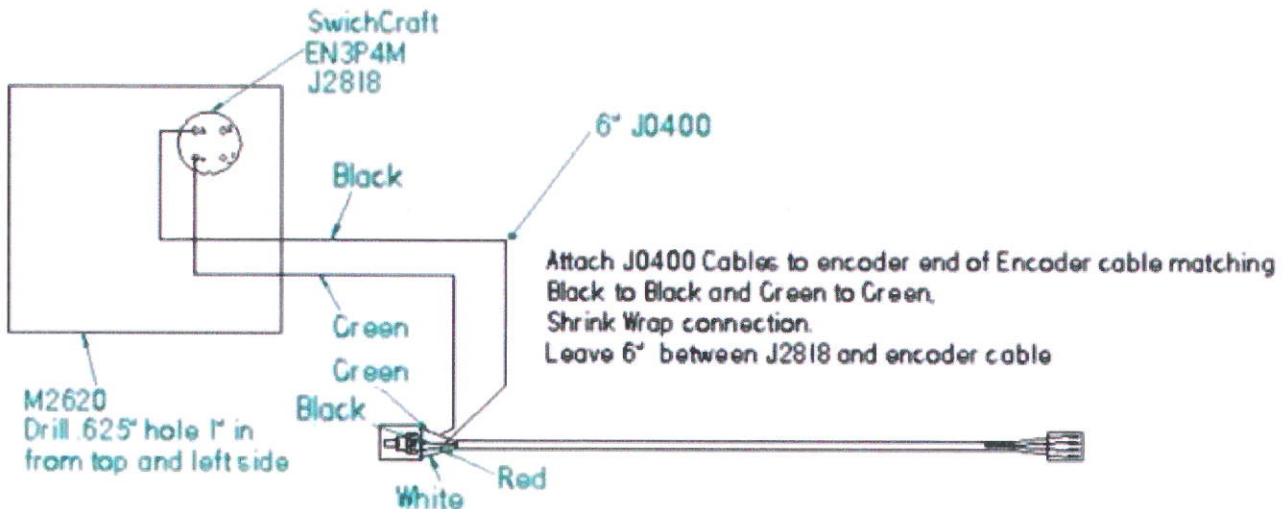

Encoder Cable Pin Out	
Pin 1	Green [Ground] It's CU print (Tie Shield in)
Pin 2	[ Index NOT USED ] No Connection
Pin 3	Black [ A channel ] It's CU print
Pin 4	Red [ + 5 VDC power ]
Pin 5	White [ B channel ]
Wire is 24 AWG	

<b>TigerStop Inc.</b>	Drawn By: DAM
Tolerance: Copyright 1994-2004	Date: 11/8/04
0.0 - - .4 0.03	Ph: 360.254.0661
0.00 - - .4 0.015	Fax: 360.260.0755
0.000 - - .4 0.005	
Sheet Metal Bend - - .4 0.15	
11x8.5 A Size	THIRD ANGLE PROJECTION

Fig. 2