TigerStop®
fast and accurate...every time

Quick Reference Card

SawGear Touch®

Quick Reference Cards are for basic setup and use of all TigerStop® products. For more detailed information, please refer to the digital manuals available at: https://www.tigerstop.com/eu/service-center/

Contact Us

TigerStop Global Headquarters

12909 NE 95th Street
Vancouver, WA 98682 USA
P: 360.254.0661 • F: 360.260.0755
Service E-mail: service@tigerstop.com
Sales E-mail: sales@tigerstop.com

TigerStop Europe

Bedrijvenstraat 17 NL-7641 AM
Wierden, The Netherlands
P: +31.546.57.51.71
Service E-mail: sos@tigerstop.nl
Sales E-mail: info@tigerstop.nl

Rev 0.1

WARNINGS!

This machine can start, move, and stop automatically. Keep hands and loose clothing clear of moving parts while operating. Moving parts can crush and cut. When used with saws or other cutting equipment, bodily injury and death may result if operated without safety guards on all machines. Do not operate with guards removed. Operators must wear adequate eye and ear protection.

HIGH VOLTAGE DANGER: Do not open motor compartment.
No user-serviceable parts inside.

Set-Up

1. Turn SawGear Touch® **ON**.
2. **Select** a **Language**.
3. **Enter the Enable Code**.
4. Select **Orientation**.
5. Select **Units**.
6. Press GO
7. Press GO again.

Home Screen

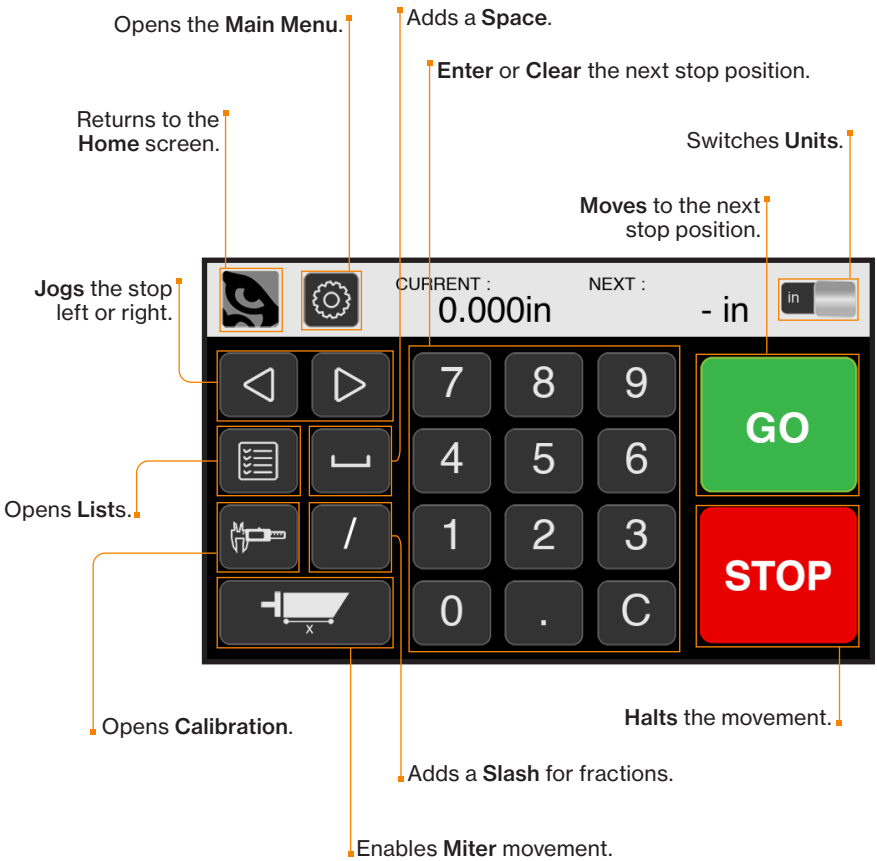
Opens the **Main Menu**.
Adds a **Space**.
Enter or **Clear** the next stop position.
Returns to the **Home** screen.
Switches **Units**.
Moves to the next stop position.
Jogs the stop left or right.
CURRENT :
0.000in
NEXT :
- in
in
7
8
9
4
5
6
1
2
3
0
.
C
GO
STOP
Opens **Lists**.
Opens **Calibration**.
Adds a **Slash** for fractions.
Enables **Miter** movement.
Halts the movement.

Manual Movement

Basic Movement

1. Enter a stop position with the keypad.
2. Press GO

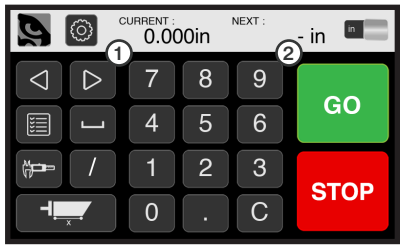

Miter Movement

1. Press
2. Select or
3. Press and enter an angle.
4. Press and enter a back length.
5. Press GO

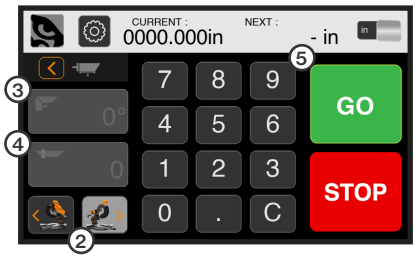

Calibrate

1. Enter 6” (152 mm) with the keypad.
2. Press GO
3. Cut and measure a sample.
4. Press
5. Enter the measurement and press

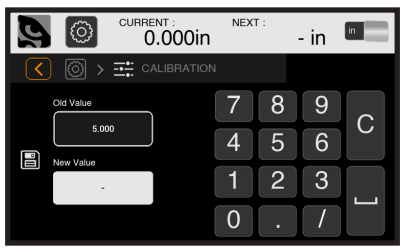

Main Menu

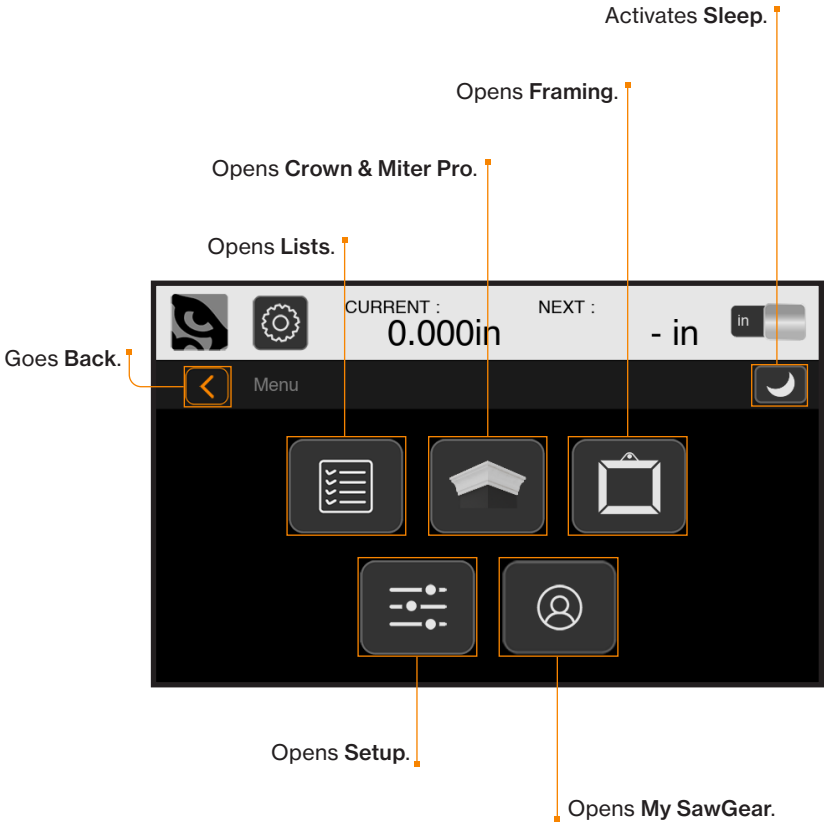
Activates **Sleep**.
Opens **Framing**.
Opens **Crown & Miter Pro**.
Opens **Lists**.
Goes **Back**.
CURRENT :
0.000in
NEXT :
- in
in
Menu
Opens **Setup**.
Opens **My SawGear**.

Crown & Miter Pro

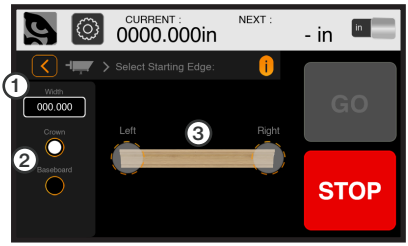

1. Enter stock **Width**.
2. Select **Crown** or **Baseboard**.
3. Select **Left** or **Right**.

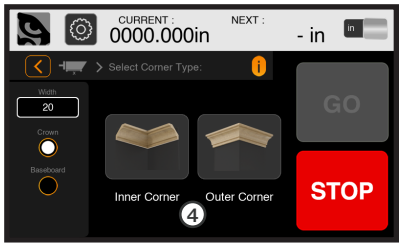

4. Select **Inner** or **Outer** corner.

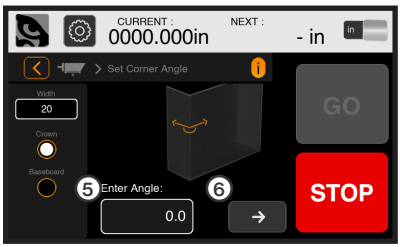

5. Enter corner **Angle**.
6. Press →

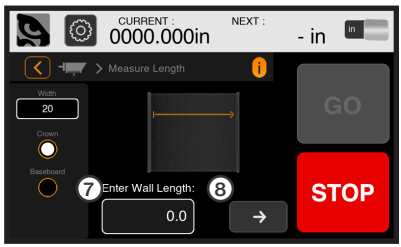

7. Enter wall **Length**.
8. Press →

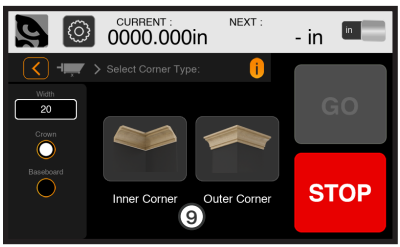

9. Select **Inner** or **Outer** corner.

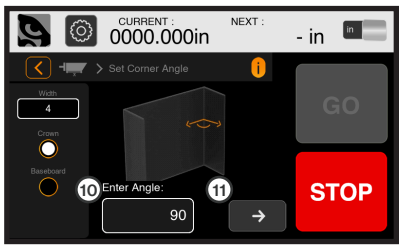

10. Enter corner **Angle**.
11. Press →

Crown & Miter Pro

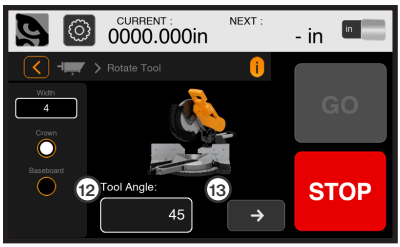

12. **Rotate** the saw.
13. Press →

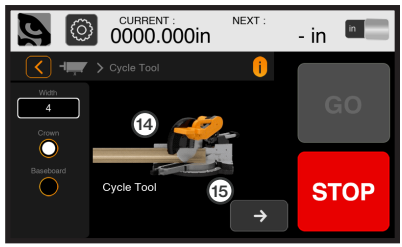

14. **Cut**.
15. Press →

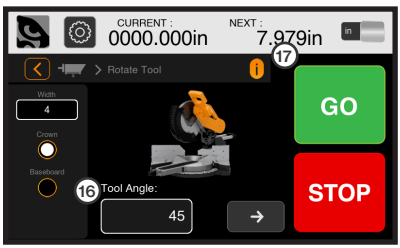

16. **Rotate** the saw.
17. Press GO

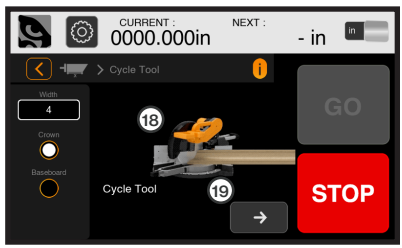

18. **Cut**.
19. Press →

Framing

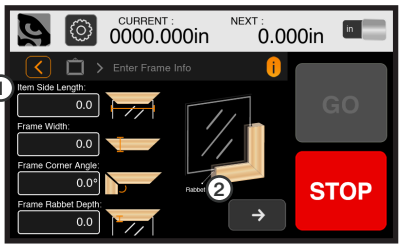

1. Enter **part information**.
2. Press →

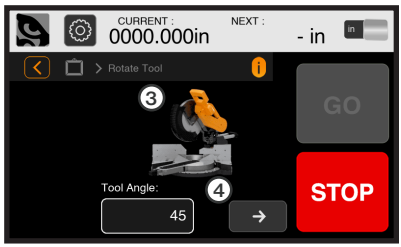

3. **Rotate** the saw.
4. Press →

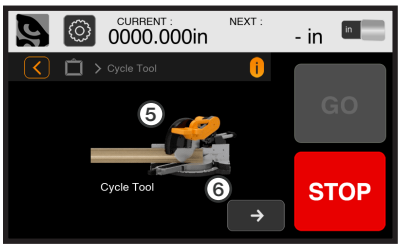

5. **Cut**.
6. Press →

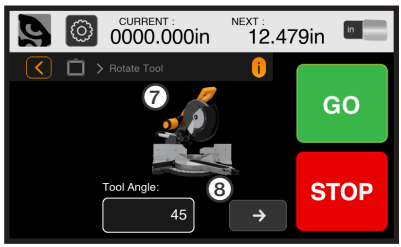

7. **Rotate** the saw.
8. Press GO

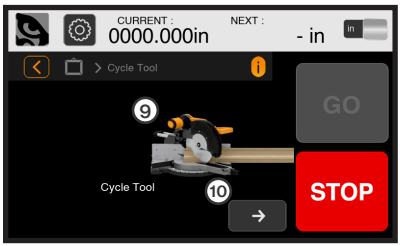

9. **Cut**.
10. Press →

Lists

Make a List

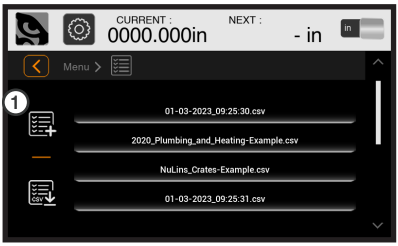

1. Press

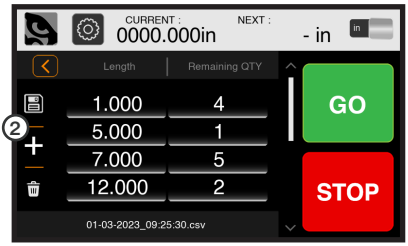

2. Press

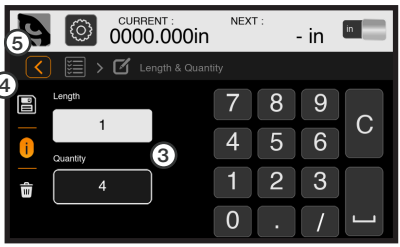

3. Enter part information.
4. Press
5. Press

Run a List

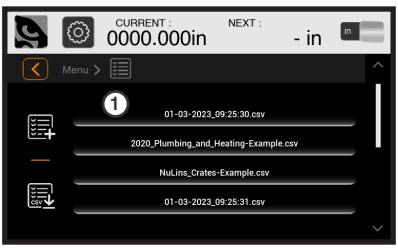

1. Select a **List**.

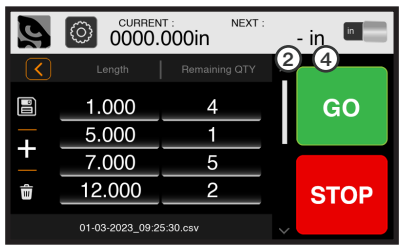

2. Press GO
3. **Cut**.
4. Press GO

www.TigerStop.com

TigerStop Global Headquarters

12909 NE 95th Street
Vancouver, WA 98682 USA
P: 360.254.0661 • F: 360.260.0755
Service E-mail: service@tigerstop.com • Sales E-mail: sales@tigerstop.com

TigerStop Europe

Bedrijvenstraat 17 NL-7641 AM Wierden
The Netherlands
P: +31.546.57.51.71
E-mail: sos@tigerstop.nl • Sales E-mail: info@tigerstop.nl

© 1994 – 2024 Precision Automation, Inc. – All Rights Reserved